

NT-5040 MC

NEO-Tera Serie 5000 offer you the best cost effective and high professional solution to build private or public robust data networks. All the series modules can operate in different modes (P-P, P-M) and frequency bands (5.2Ghz-5.8Ghz) with just a simple configuration selection, giving you a very high flexibility and costs savings.



Benefits:

- ♦ Very fast installation and configuration
- ♦ Cost savings: flexibility / modularity / NoLOS
- ♦ Scalability / Linear costs
- ♦ High Availability and Quality of Service
- ♦ All in one solution : Bridge + Advanced Router
- ♦ Multi-Topologies: P-P, P-MP, Mesh, Ring, Redundancy, etc.



NEO-Tera NT-5040MC is an ODU (Outdoor Unit) designed to work like a end of a point-to-point link or like a remote station within a multipoint network. Its integrated design is based on a high availability hardware and software capable to handle up to 14Mbps of data throughput with a very high quality panel antenna. It is not a simple bridge, it is also an advanced router with VPN server, VLAN/trunking, QoS and other upper level features.

Technical Specifications



General

Operation Frequency		Multi Band	Operating Mode	
Band 1		5.150GHz~5.250GHz	P-P	✓
Band 2		5.250GHz~5.350GHz	P-MP	✓
Band 3		5.470GHz~5.725GHz	Mesh	✓
Band 4		5.725GHz~5.850GHz	Dual Radio	✓
			NoLOS	✓
Link			Power Supply	
Link type		Ethernet / IP	PoE (Power Over Ethernet)	IEEE.802.11af (*)
Traffic Balance		Sim / Asim	Voltage Rating	220VAC/14-60VDC
Throughput (L3)		14Mbps (upgradeable)	Power Consumption	14W
Link Reach (Typ)			EDS Protection	ITU-T K.12 (*)
P-P		20Km		
P-MP		15Km		

NT-5040 MC

Radio Specifications

Radio MAC/PHY

Transmission Protocol	Pre-WiMax
Modulation	OFDM
Modulation Technique	BPSK / QPSK / 16QAM / 64QAM
Access Method	TDMA
Duplexing	TDD/TDM
Central Frequency Resolution	5Mhz
Channel Width	5/10/20/40MHz

Tx Power

TX Power @ 64QAM	14dbm
TX Power @ BPSK	18dbm
ERIP (Typ)	40db

RX Sensitivity

RX Sensit. @ 64QAM	-71dbm
RX Sensit.@ BPSK	-88dbm

Advanced Features

VPN	L2/L3/L4
VLAN	IEEE802.1q
Tunneling	EoIP
Encryption	WEP / WPA / DES / AES

Routing

Static Routing	✓
MPLS / VRF	✓
OSPF / RIP/ BGP/ PIM/ IGMP	✓
VRRP (High Availability)	✓

Quality of Service (QoS)

Traffic Shaping	✓
Load Balancing; Broadcast control	✓
Bandwidth Control	

L2/L3/L4

	✓
	✓
CIR / MIR / Bursting	

Management & Monitoring


SNMP	RFC 1592
Graphical Interface (GUI)	WinXP/Win7/Linux

Integrated Antenna


Gain / Diversity	23dbi
Polarization	V/H
Directivity	9°
Cross Polar. Discrimination	-28db
F/B Ratio	-35db
Lightning Protection	DC Grounded

Radiation Patterns

Azimuth

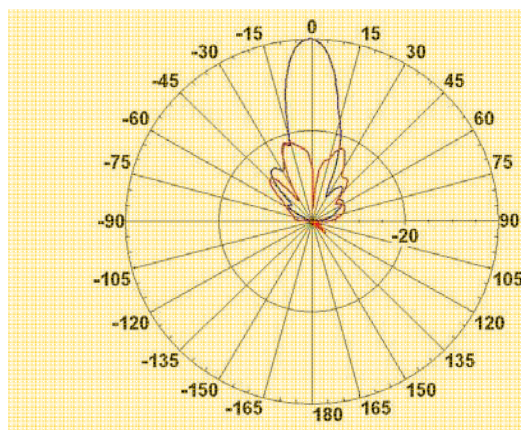

Elavation

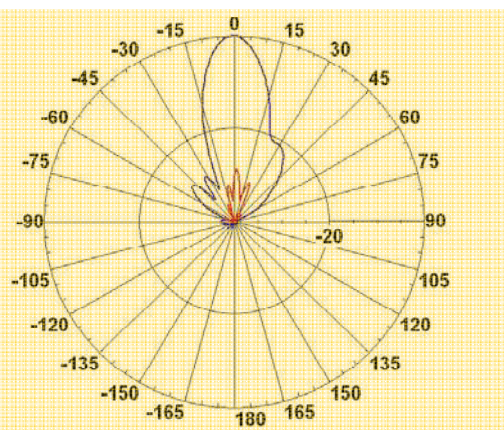

NT-5040 MC

Enviromental


Wind Load (Side)	4,6Kg
Humidity	95%
Enclosure Material	Aluminum
Wind Speed Survival	220Km/h

TEST	STANDARD	DURATION	TEMPERTURE	NOTES
Low Temperature	IEC 68-2-1	72 h	-45°C	
High Tempreature	IEC 68-2-2	72 h	+70°C	
Temp. Cycling	IEC 68-2-14	1 h	-45°C ~ +70°C	3 Cycles
Vibrations	IEC 60721-3-4	30 min/axis		Random4M3
Shock Mechanical	IEC 60721-3-4			4M3
Humidity	ETSI EN300-2-4 T4.1E	144 h		95%
Water Tightness	IEC 529			IP67
Solar Radiation	ASTM G53	1000 h		
Flammability	UL 94			Class HB
Salt Spray	IEC 68-2-11 Ka	500 h		
Ice and Snow				25mm Radial

Mechanical

Physical Specification	
Dimensions LxWxD	305x305X85mm
Weight	6,5Kg
Wind Speed Operation	160Km/h
Wind Load (Front)	26,8Kg

Pole Mount

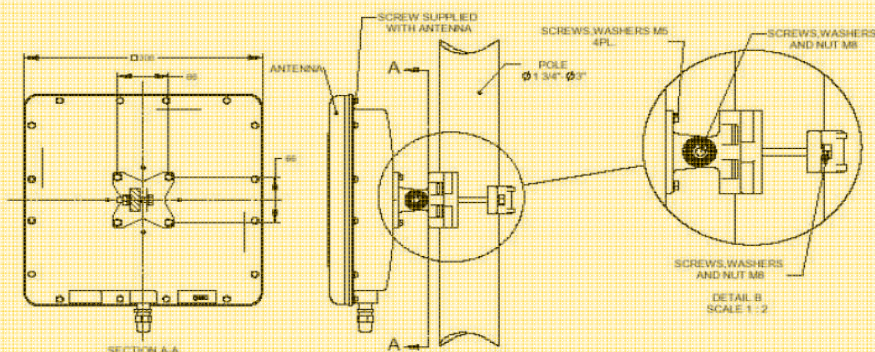

Wall Mount

